




Maximum & Minimum Frame Sizes


Issue: Nov 2014

92mm Sliding Window




Frame Height (mm)		Frame Width (mm)		
Minimum	Maximum	Minimum	Maximum	Bal 40
260	1550	350	2410	✓
260	1550	700	3610	✓
260	1550	700	4810	✓
700	2400	350	2410	✓
700	2400	700	3610	✓

92mm Awning Window




Minimum	Maximum	Minimum	Maximum	
446	1550	395	1256	✓
446	1550	774	2496	✓
446	1550	1161	3720	✓
600	2488	774	2496	✓
600	2488	1161	3720	✓

92mm Double Hung Window




Minimum	Maximum	Minimum	Maximum	
889	2219	368	1218	✓
889	2219	736	2436	✓
889	2219	1104	3654	✓
1000	2400	736	2436	✓
1000	2400	1104	3654	✓

92mm Sliding/Stacking Door

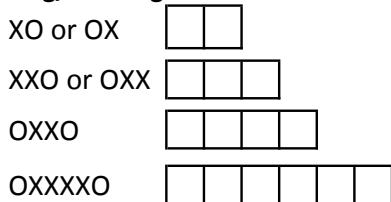


Minimum	Maximum	Minimum	Maximum	
800	2445	1000	2448	✓
800	2445	1500	3648	✓
800	2445	1800	4850	✓
800	2445	3000	6500	✓

125mm Hinge Door



Minimum	Maximum	Minimum	Maximum	
500	2400	358	958	✓
500	2400	656	1856	✓

92mm Bi-Fold

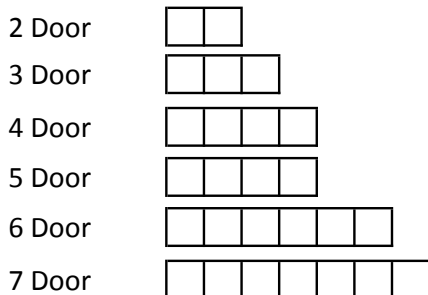

Minimum	Maximum	Minimum	Maximum	
500	2400	665	1866	✓
500	2400	968	2770	✓
500	2400	1274	3674	✓
500	2400	1578	4578	✓
500	2400	1882	5482	✓
500	2400	2186	6386	✓

2012 WERS Certified Products Directory Commercial - AFRC



NOTES

1. Uw is the whole window U-value
2. SHGCw is the whole window solar heat gain coefficient
3. Tvw is the whole window visible (light) transmittance
4. Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
5. Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
6. Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



7. Ratings for use with Section J of the Building Code of Australia - Class 2-9

Alspec Updated 41975		Total Window - AFRC			
Window ID	Glazing	Uw	SHGC	Tvw	Air Inf
Hawkesbury Folding Door - Double Glazed					
ALS-011-01	6/12/6	4.0	0.51	0.54	0.47
ALS-011-02	6.38Lam/12/6.38Lam	4.0	0.48	0.54	0.47
ALS-011-03	6/12/6EA	3.5	0.47	0.50	0.47
ALS-011-04	6EG/12/6	4.0	0.29	0.40	0.47
ALS-011-05	6EG/12/6EA	3.5	0.25	0.37	0.47
ALS-011-06	6TS21/12/6	3.8	0.15	0.11	0.47
ALS-011-07	6TS21/12/6EA	3.5	0.44	0.50	0.47
ALS-011-08	6EVGy/12/6	3.6	0.25	0.20	0.47
Hawkesbury Folding Door - Single Glazed					
ALS-012-01	6Clr	6.0	0.59	0.61	0.47
ALS-012-02	6.38Lam	5.9	0.57	0.62	0.47
ALS-012-03	6.38CP	4.4	0.49	0.57	0.47
ALS-012-04	6EcAd	4.6	0.45	0.46	0.47
ALS-012-05	6EG	6.0	0.37	0.46	0.47
ALS-012-06	6AB	6.0	0.37	0.37	0.47
ALS-012-07	6.38CPNtrl	4.5	0.37	0.41	0.47
ALS-012-08	6.38CPGn	4.4	0.36	0.49	0.47
ALS-012-09	6.38CPGy	4.4	0.36	0.27	0.47
ALS-012-10	6EcAdBz	4.6	0.33	0.26	0.47
ALS-012-11	6EcAdBIGn	4.6	0.33	0.39	0.47
ALS-012-12	6EcAdGy	4.6	0.30	0.22	0.47
ALS-012-13	6EcAdGn	4.6	0.26	0.33	0.47
ALS-012-14	6EcAdAB	4.6	0.26	0.27	0.47

2012 WERS Certified Products Directory - AFRC

- NOTES
- 1.Uw is the whole window U-value
 - 2.SHGCw is the whole window solar heat gain coefficient
 - 3.Tvw is the whole window visible (light) transmittance
 - 4.Percentage improvement figures are compared with using base-case Generic Window 1 (3mm clear in standard aluminium frame)
 - 5.A negative percentage improvement figure indicates performance worse than the base-case window
 - 6.A positive percentage improvement figure indicates performance better than the base-case window
 - 7.Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
 - 8.Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
 - 9.Annual energy performance (stars and % improvements) calculated using Nationwide House Energy Rating Software (AccuRate) according to procedures of WERS 2008.
 - 10.Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



Alspect Updated 02-Dec-14				Cool %	Heat %	Total Window - AFRC				
Window ID	Glazing	Cooling Stars	Heating Stars			Uw	SHGC	Tvw	Air Inf	
92mm Carinya Classic Sliding Door - Double Glazed										
ALS-037-01	4/10/4	★★	★★★★☆	35%	45%	3.9	0.62	0.65	0.82	
ALS-037-02	5/8/5	★★	★★★★☆	37%	43%	4.0	0.59	0.64	0.82	
ALS-037-03	4ST/10/4	★★★★	★★★★	56%	40%	3.3	0.39	0.44	0.82	
ALS-037-04	4ET/10/4	★★★☆☆	★★★★★	43%	49%	3.3	0.56	0.62	0.82	
ALS-037-05	5Gy/9/4	★★★☆☆	★★★★☆	51%	35%	3.9	0.42	0.35	0.82	
ALS-037-06	6SG/8/4	★★★★	★★★★☆	56%	30%	4.0	0.35	0.49	0.82	
ALS-037-07	5Gy/9Ar/4	★★★☆☆	★★★★★	52%	37%	3.7	0.42	0.35	0.82	
ALS-037-08	6SG/8Ar/4	★★★★	★★★★☆	57%	32%	3.8	0.34	0.49	0.82	
ALS-037-09	5Gy/8Ar/5ET	★★★★	★★★★★	58%	41%	3.1	0.37	0.32	0.82	
92mm Carinya Classic Sliding Door - Single Glazed										
ALS-038-01	4Clr	★	★★★☆☆	16%	20%	6.1	0.71	0.73	0.82	
ALS-038-02	5Clr	★	★★★☆☆	18%	20%	6.1	0.68	0.72	0.82	
ALS-038-03	4Gy	★☆☆	★★★☆☆	31%	13%	6.1	0.55	0.45	0.82	
ALS-038-04	5Gy	★★	★★★☆☆	34%	11%	6.1	0.51	0.39	0.82	
ALS-038-05	6EVClr	★★★☆☆	★★★★☆	41%	33%	4.4	0.52	0.54	0.82	
ALS-038-06	6EVGy	★★★☆☆	★★★★	54%	24%	4.4	0.34	0.26	0.82	
ALS-038-07	6EVBG	★★★☆☆	★★★★	52%	26%	4.4	0.37	0.46	0.82	
ALS-038-08	6EVSG	★★★★	★★★☆☆	57%	21%	4.4	0.30	0.39	0.82	
ALS-038-09	638CPGn	★★★★	★★★★☆	50%	30%	4.3	0.42	0.58	0.82	
ALS-038-10	638CPGy	★★★☆☆	★★★★☆	50%	30%	4.3	0.41	0.32	0.82	
ALS-038-11	638CPNtl	★★★★	★★★★☆	49%	30%	4.3	0.42	0.48	0.82	
ALS-038-12	638CPClr	★★★☆☆	★★★★★	38%	38%	4.3	0.56	0.67	0.82	
ALS-038-13	10.38CPClr	★★★☆☆	★★★★☆	40%	34%	4.5	0.53	0.65	0.82	
ALS-038-14	10.38EVGy	★★★☆☆	★★★☆☆	54%	21%	4.6	0.33	0.26	0.82	
ALS-038-15	10.38VLamClr	★☆☆	★★★☆☆	25%	16%	6.1	0.62	0.70	0.82	
ALS-038-16	10.38EVSG	★★★☆☆	★★★★	55%	23%	4.5	0.33	0.49	0.82	
ALS-038-17	10.38VLamSG	★★★☆☆	★★★☆☆	40%	7%	6.1	0.42	0.53	0.82	
ALS-038-18	8.38CPClr	★★★☆☆	★★★★☆	38%	34%	4.5	0.55	0.66	0.82	
ALS-038-19	8.38CPGy40	★★★★	★★★★	49%	26%	4.5	0.40	0.32	0.82	
ALS-038-20	6.38VLamClr	★	★★★☆☆	21%	16%	6.3	0.65	0.72	0.82	
ALS-038-21	6.38VLamGy	★★	★★★☆☆	33%	10%	6.3	0.51	0.34	0.82	
ALS-038-22	10.38CPGy40	★★★☆☆	★★★★	50%	27%	4.5	0.39	0.31	0.82	
ALS-038-23	10.38VLamGy	★★	★★★☆☆	36%	10%	6.1	0.49	0.34	0.82	

ALS-038-24	6EI	★ ★	★ ★ ★ ★	37%	38%	4.3	0.58	0.67	0.82
ALS-038-25	6Clr	★	★ ★ ☆	19%	20%	6.1	0.68	0.72	0.82

2012 WERS Certified Products Directory - AFRC

- NOTES
- 1.Uw is the whole window U-value
 - 2.SHGCw is the whole window solar heat gain coefficient
 - 3.Tvw is the whole window visible (light) transmittance
 - 4.Percentage improvement figures are compared with using base-case Generic Window 1 (3mm clear in standard aluminium frame)
 - 5.A negative percentage improvement figure indicates performance worse than the base-case window
 - 6.A positive percentage improvement figure indicates performance better than the base-case window
 - 7.Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
 - 8.Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
 - 9.Annual energy performance (stars and % improvements) calculated using Nationwide House Energy Rating Software (AccuRate) according to procedures of WERS 2008.
 - 10.Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



Alspec Updated 02-Dec-14				Cool %	Heat %	Total Window - AFRC				
Window ID	Glazing	Cooling Stars	Heating Stars			Uw	SHGC	Tvw	Air Inf	
Carinya Select 125 Hinged Door - Single Glazed										
ALS-044-01	6.38CPGy	★ ★ ★ ☆	★ ★ ☆	53%	21%	4.4	0.35	0.27	5.00	
ALS-044-02	6.38CPClr	★ ★ ☆	★ ★ ★	44%	28%	4.4	0.48	0.56	5.00	
ALS-044-03	6.38ClrLam	★ ★	★ ★	32%	13%	5.8	0.55	0.60	5.00	
ALS-044-04	6.38GyLam	★ ★ ☆	★ ★	40%	7%	5.8	0.43	0.29	5.00	
ALS-044-05	6EVClr	★ ★ ★	★ ★ ★	46%	24%	4.6	0.45	0.47	5.00	
ALS-044-06	6Clr	★ ☆	★ ★	29%	14%	5.9	0.58	0.60	5.00	
ALS-044-07	5Gy	★ ★ ☆	★ ☆	40%	6%	5.9	0.43	0.32	5.00	
ALS-044-08	5EI	★ ★ ☆	★ ★ ★	42%	28%	4.5	0.50	0.56	5.00	
ALS-044-09	5Clr	★ ☆	★ ★	29%	13%	5.9	0.58	0.60	5.00	
Carinya Select 125 Hinged Door - Double Glazed										
ALS-045-01	6.38CPClr/12/5	★ ★ ★ ☆	★ ★ ★ ★	53%	37%	3.4	0.43	0.50	5.00	
ALS-045-02	4EI/16/4Gy	★ ★ ★ ☆	★ ★ ★ ★	52%	37%	3.4	0.43	0.32	5.00	
ALS-045-03	4/16/4	★ ★ ☆	★ ★ ★ ★	43%	36%	3.9	0.53	0.55	5.00	
ALS-045-04	5Gy/14/5	★ ★ ★ ☆	★ ★ ★	55%	26%	3.9	0.35	0.29	5.00	

2012 WERS Certified Products Directory - AFRC

- NOTES
- 1.Uw is the whole window U-value
 - 2.SHGCw is the whole window solar heat gain coefficient
 - 3.Tvw is the whole window visible (light) transmittance
 - 4.Percentage improvement figures are compared with using base-case Generic Window 1 (3mm clear in standard aluminium frame)
 - 5.A negative percentage improvement figure indicates performance worse than the base-case window
 - 6.A positive percentage improvement figure indicates performance better than the base-case window
 - 7.Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
 - 8.Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
 - 9.Annual energy performance (stars and % improvements) calculated using Nationwide House Energy Rating Software (AccuRate) according to procedures of WERS 2008.
 - 10.Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



Alspec Updated 02-Dec-14				Cool %	Heat %	Total Window - AFRC				
Window ID	Glazing	Cooling Stars	Heating Stars			Uw	SHGC	Tvw	Air Inf	
92mm Carinya Select Double Hung Window - Double Glazed										
ALS-039-01	4/10/4	★★	★★★★	37%	41%	4.2	0.59	0.62	0.48	
ALS-039-02	5/8/5	★★☆	★★★★	38%	38%	4.3	0.56	0.61	0.48	
ALS-039-03	4ST/10/4	★★★★	★★★★	56%	36%	3.6	0.37	0.41	0.48	
ALS-039-04	4ET/10/4	★★☆	★★★★☆	44%	44%	3.6	0.54	0.58	0.48	
ALS-039-05	5Gy/9/4	★★★☆☆	★★★☆☆	51%	30%	4.2	0.40	0.33	0.48	
ALS-039-06	6SG/8/4	★★★★	★★★	55%	26%	4.3	0.33	0.46	0.48	
ALS-039-07	5Gy/9Ar/4	★★★☆☆	★★★☆☆	52%	32%	4.1	0.40	0.33	0.48	
ALS-039-08	6SG/8Ar/4	★★★★	★★★	56%	27%	4.1	0.33	0.46	0.48	
ALS-039-09	6EVClr/8Ar/4	★★★☆☆	★★★★	51%	40%	3.6	0.44	0.47	0.48	
ALS-039-10	5Gy/8Ar/5ET	★★★★	★★★★	57%	36%	3.5	0.35	0.30	0.48	
92mm Carinya Select Double Hung Window - Single Glazed										
ALS-040-01	4Clr	★	★★	18%	14%	6.5	0.67	0.68	0.48	
ALS-040-02	5Clr	★	★★	20%	14%	6.5	0.65	0.68	0.48	
ALS-040-03	4Gy	★☆☆	★★	31%	7%	6.5	0.52	0.43	0.48	
ALS-040-04	5Gy	★★	★★☆	34%	6%	6.5	0.48	0.36	0.48	
ALS-040-05	6EVClr	★★☆☆	★★★	41%	27%	4.9	0.49	0.51	0.48	
ALS-040-06	6EVGy	★★★☆☆	★★★☆☆	53%	17%	4.9	0.33	0.25	0.48	
ALS-040-07	6EVBG	★★★☆☆	★★★☆☆	50%	19%	4.9	0.36	0.43	0.48	
ALS-040-08	6EVSG	★★★☆☆	★★★☆☆	55%	15%	4.9	0.29	0.37	0.48	
ALS-040-09	638CPGn	★★★★	★★★	49%	24%	4.8	0.40	0.54	0.48	
ALS-040-10	638CPGy	★★★★	★★★	49%	23%	4.8	0.39	0.30	0.48	
ALS-040-11	638CPNtl	★★★★	★★★	48%	24%	4.8	0.40	0.45	0.48	
ALS-040-12	638CPClr	★★★☆☆	★★★★☆	38%	31%	4.8	0.54	0.63	0.48	
ALS-040-13	10.38CPClr	★★★☆☆	★★★★☆	40%	29%	4.8	0.51	0.62	0.48	
ALS-040-14	10.38EVGy	★★★☆☆	★★★☆☆	53%	16%	5.0	0.32	0.24	0.48	
ALS-040-15	10.38VLamClr	★☆☆	★★	26%	12%	6.4	0.59	0.67	0.48	
ALS-040-16	10.38EVSG	★★★☆☆	★★★☆☆	54%	18%	4.8	0.31	0.46	0.48	
ALS-040-17	10.38VLamSG	★★☆☆	★★☆☆	40%	3%	6.4	0.41	0.50	0.48	
ALS-040-18	8.38CPClr	★★★☆☆	★★★★☆	39%	29%	4.9	0.53	0.63	0.48	
ALS-040-19	8.38CPGy40	★★★★	★★★	49%	22%	4.9	0.39	0.30	0.48	
ALS-040-20	6.38VLamClr	★	★★	22%	12%	6.5	0.62	0.68	0.48	
ALS-040-21	6.38VLamGy	★★	★★☆☆	34%	6%	6.5	0.48	0.32	0.48	
ALS-040-22	10.38CPGy40	★★★★	★★★	50%	22%	4.8	0.38	0.30	0.48	

ALS-040-23	10.38VLamGy	★ ★	★ ☆	36%	6%	6.4	0.47	0.32	0.48
ALS-040-24	6EI	★ ★	★ ★ ★ ☆	37%	31%	4.8	0.55	0.63	0.48
ALS-040-25	6Clr	★	★ ★ ☆	21%	14%	6.4	0.65	0.68	0.48

2012 WERS Certified Products Directory - AFRC

- NOTES
- 1.Uw is the whole window U-value
 - 2.SHGCw is the whole window solar heat gain coefficient
 - 3.Tvw is the whole window visible (light) transmittance
 - 4.Percentage improvement figures are compared with using base-case Generic Window 1 (3mm clear in standard aluminium frame)
 - 5.A negative percentage improvement figure indicates performance worse than the base-case window
 - 6.A positive percentage improvement figure indicates performance better than the base-case window
 - 7.Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
 - 8.Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
 - 9.Annual energy performance (stars and % improvements) calculated using Nationwide House Energy Rating Software (AccuRate) according to procedures of WERS 2008.
 - 10.Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



Alspec Updated 02-Dec-14				Cool %	Heat %	Total Window - AFRC				
Window ID	Glazing	Cooling Stars	Heating Stars			Uw	SHGC	Tvw	Air Inf	
92mm Carinya Classic Sliding Door - Double Glazed										
ALS-037-01	4/10/4	★★	★★★★☆	35%	45%	3.9	0.62	0.65	0.82	
ALS-037-02	5/8/5	★★	★★★★☆	37%	43%	4.0	0.59	0.64	0.82	
ALS-037-03	4ST/10/4	★★★★	★★★★	56%	40%	3.3	0.39	0.44	0.82	
ALS-037-04	4ET/10/4	★★★☆☆	★★★★★	43%	49%	3.3	0.56	0.62	0.82	
ALS-037-05	5Gy/9/4	★★★☆☆	★★★★☆	51%	35%	3.9	0.42	0.35	0.82	
ALS-037-06	6SG/8/4	★★★★	★★★★☆	56%	30%	4.0	0.35	0.49	0.82	
ALS-037-07	5Gy/9Ar/4	★★★☆☆	★★★★★	52%	37%	3.7	0.42	0.35	0.82	
ALS-037-08	6SG/8Ar/4	★★★★	★★★★☆	57%	32%	3.8	0.34	0.49	0.82	
ALS-037-09	5Gy/8Ar/5ET	★★★★	★★★★★	58%	41%	3.1	0.37	0.32	0.82	
92mm Carinya Classic Sliding Door - Single Glazed										
ALS-038-01	4Clr	★	★★★☆☆	16%	20%	6.1	0.71	0.73	0.82	
ALS-038-02	5Clr	★	★★★☆☆	18%	20%	6.1	0.68	0.72	0.82	
ALS-038-03	4Gy	★☆☆	★★★☆☆	31%	13%	6.1	0.55	0.45	0.82	
ALS-038-04	5Gy	★★	★★★☆☆	34%	11%	6.1	0.51	0.39	0.82	
ALS-038-05	6EVClr	★★★☆☆	★★★★☆	41%	33%	4.4	0.52	0.54	0.82	
ALS-038-06	6EVGy	★★★☆☆	★★★★	54%	24%	4.4	0.34	0.26	0.82	
ALS-038-07	6EVBG	★★★☆☆	★★★★	52%	26%	4.4	0.37	0.46	0.82	
ALS-038-08	6EVSG	★★★★	★★★☆☆	57%	21%	4.4	0.30	0.39	0.82	
ALS-038-09	638CPGn	★★★★	★★★★☆	50%	30%	4.3	0.42	0.58	0.82	
ALS-038-10	638CPGy	★★★☆☆	★★★★☆	50%	30%	4.3	0.41	0.32	0.82	
ALS-038-11	638CPNtl	★★★★	★★★★☆	49%	30%	4.3	0.42	0.48	0.82	
ALS-038-12	638CPClr	★★★☆☆	★★★★★	38%	38%	4.3	0.56	0.67	0.82	
ALS-038-13	10.38CPClr	★★★☆☆	★★★★☆	40%	34%	4.5	0.53	0.65	0.82	
ALS-038-14	10.38EVGy	★★★☆☆	★★★☆☆	54%	21%	4.6	0.33	0.26	0.82	
ALS-038-15	10.38VLamClr	★☆☆	★★★☆☆	25%	16%	6.1	0.62	0.70	0.82	
ALS-038-16	10.38EVSG	★★★☆☆	★★★★	55%	23%	4.5	0.33	0.49	0.82	
ALS-038-17	10.38VLamSG	★★★☆☆	★★★☆☆	40%	7%	6.1	0.42	0.53	0.82	
ALS-038-18	8.38CPClr	★★★☆☆	★★★★☆	38%	34%	4.5	0.55	0.66	0.82	
ALS-038-19	8.38CPGy40	★★★★	★★★★	49%	26%	4.5	0.40	0.32	0.82	
ALS-038-20	6.38VLamClr	★	★★★☆☆	21%	16%	6.3	0.65	0.72	0.82	
ALS-038-21	6.38VLamGy	★★	★★★☆☆	33%	10%	6.3	0.51	0.34	0.82	
ALS-038-22	10.38CPGy40	★★★☆☆	★★★★	50%	27%	4.5	0.39	0.31	0.82	
ALS-038-23	10.38VLamGy	★★	★★★☆☆	36%	10%	6.1	0.49	0.34	0.82	

ALS-038-24	6EI	★ ★	★ ★ ★ ★	37%	38%	4.3	0.58	0.67	0.82
ALS-038-25	6Clr	★	★ ★ ☆	19%	20%	6.1	0.68	0.72	0.82

2012 WERS Certified Products Directory Commercial - AFRC



NOTES

1. Uw is the whole window U-value
2. SHGCw is the whole window solar heat gain coefficient
3. Tvw is the whole window visible (light) transmittance
4. Maximum air infiltration is 5.0L/s.m2 at a positive pressure difference of 75 Pa as measured according to AS 2047
5. Static performance (Uw SHGCw Tvw Tdw) calculated using Window 6.3 and Therm 6.3 software (LBNL), 1999-2010
6. Results disclosed at Australian Fenestration Rating Council (AFRC) regulations.



7. Ratings for use with Section J of the Building Code of Australia - Class 2-9

Alspec Updated 41975		Total Window - AFRC			
Window ID	Glazing	Uw	SHGC	Tvw	Air Inf
Hawkesbury Folding Door - Double Glazed					
ALS-011-01	6/12/6	4.0	0.51	0.54	0.47
ALS-011-02	6.38Lam/12/6.38Lam	4.0	0.48	0.54	0.47
ALS-011-03	6/12/6EA	3.5	0.47	0.50	0.47
ALS-011-04	6EG/12/6	4.0	0.29	0.40	0.47
ALS-011-05	6EG/12/6EA	3.5	0.25	0.37	0.47
ALS-011-06	6TS21/12/6	3.8	0.15	0.11	0.47
ALS-011-07	6TS21/12/6EA	3.5	0.44	0.50	0.47
ALS-011-08	6EVGy/12/6	3.6	0.25	0.20	0.47
Hawkesbury Folding Door - Single Glazed					
ALS-012-01	6Clr	6.0	0.59	0.61	0.47
ALS-012-02	6.38Lam	5.9	0.57	0.62	0.47
ALS-012-03	6.38CP	4.4	0.49	0.57	0.47
ALS-012-04	6EcAd	4.6	0.45	0.46	0.47
ALS-012-05	6EG	6.0	0.37	0.46	0.47
ALS-012-06	6AB	6.0	0.37	0.37	0.47
ALS-012-07	6.38CPNtrl	4.5	0.37	0.41	0.47
ALS-012-08	6.38CPGn	4.4	0.36	0.49	0.47
ALS-012-09	6.38CPGy	4.4	0.36	0.27	0.47
ALS-012-10	6EcAdBz	4.6	0.33	0.26	0.47
ALS-012-11	6EcAdBIGn	4.6	0.33	0.39	0.47
ALS-012-12	6EcAdGy	4.6	0.30	0.22	0.47
ALS-012-13	6EcAdGn	4.6	0.26	0.33	0.47
ALS-012-14	6EcAdAB	4.6	0.26	0.27	0.47

ALS-012-15	6SpGy	6.0	0.26	0.06	0.47
ALS-012-16	10.38GyLam	6.0	0.43	0.29	0.47
ALS-012-17	6.38GyLam	6.1	0.45	0.29	0.47
ALS-012-18	6Gy	6.2	0.42	0.29	0.47


ALS-012-15	6SpGy	6.0	0.26	0.06	0.47
ALS-012-16	10.38GyLam	6.0	0.43	0.29	0.47
ALS-012-17	6.38GyLam	6.1	0.45	0.29	0.47
ALS-012-18	6Gy	6.2	0.42	0.29	0.47



Maximum & Minimum Frame Sizes


Issue: Nov 2014

92mm Sliding Window




Frame Height (mm)		Frame Width (mm)		
Minimum	Maximum	Minimum	Maximum	Bal 40
260	1550	350	2410	✓
260	1550	700	3610	✓
260	1550	700	4810	✓
700	2400	350	2410	✓
700	2400	700	3610	✓

92mm Awning Window




Minimum	Maximum	Minimum	Maximum	
446	1550	395	1256	✓
446	1550	774	2496	✓
446	1550	1161	3720	✓
600	2488	774	2496	✓
600	2488	1161	3720	✓

92mm Double Hung Window




Minimum	Maximum	Minimum	Maximum	
889	2219	368	1218	✓
889	2219	736	2436	✓
889	2219	1104	3654	✓
1000	2400	736	2436	✓
1000	2400	1104	3654	✓

92mm Sliding/Stacking Door

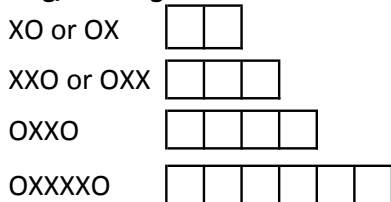


Minimum	Maximum	Minimum	Maximum	
800	2445	1000	2448	✓
800	2445	1500	3648	✓
800	2445	1800	4850	✓
800	2445	3000	6500	✓

125mm Hinge Door



Minimum	Maximum	Minimum	Maximum	
500	2400	358	958	✓
500	2400	656	1856	✓

92mm Bi-Fold

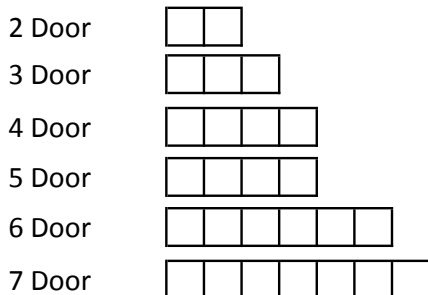

Minimum	Maximum	Minimum	Maximum	
500	2400	665	1866	✓
500	2400	968	2770	✓
500	2400	1274	3674	✓
500	2400	1578	4578	✓
500	2400	1882	5482	✓
500	2400	2186	6386	✓